

Table saw

SB200DS

SB250

SB250D

SB200C

SB250C

MJ10-I

MJ10-II

Panel saw

MJ10-1000F

MJ10-1300E

MJ10-1600E

MJ12-1360E

MJ12-1600E

MJ12-1600E-III

MJ12-1600/1600II

MJ12-1800/1800II

MJ12-2000/2000II

MJ12-2600/2600II

MJ12-2800/2800II

MJ6113TYB

MJ6116TYB

MJ6118TYB

MJ6125TYB

MJ6128TYB

MJ6132TYB

MJ6125TY


MJ6128TY

MJ6132TY

SMV8D

SMV8-XJ

ACCESSORY FOR PANEL SAW

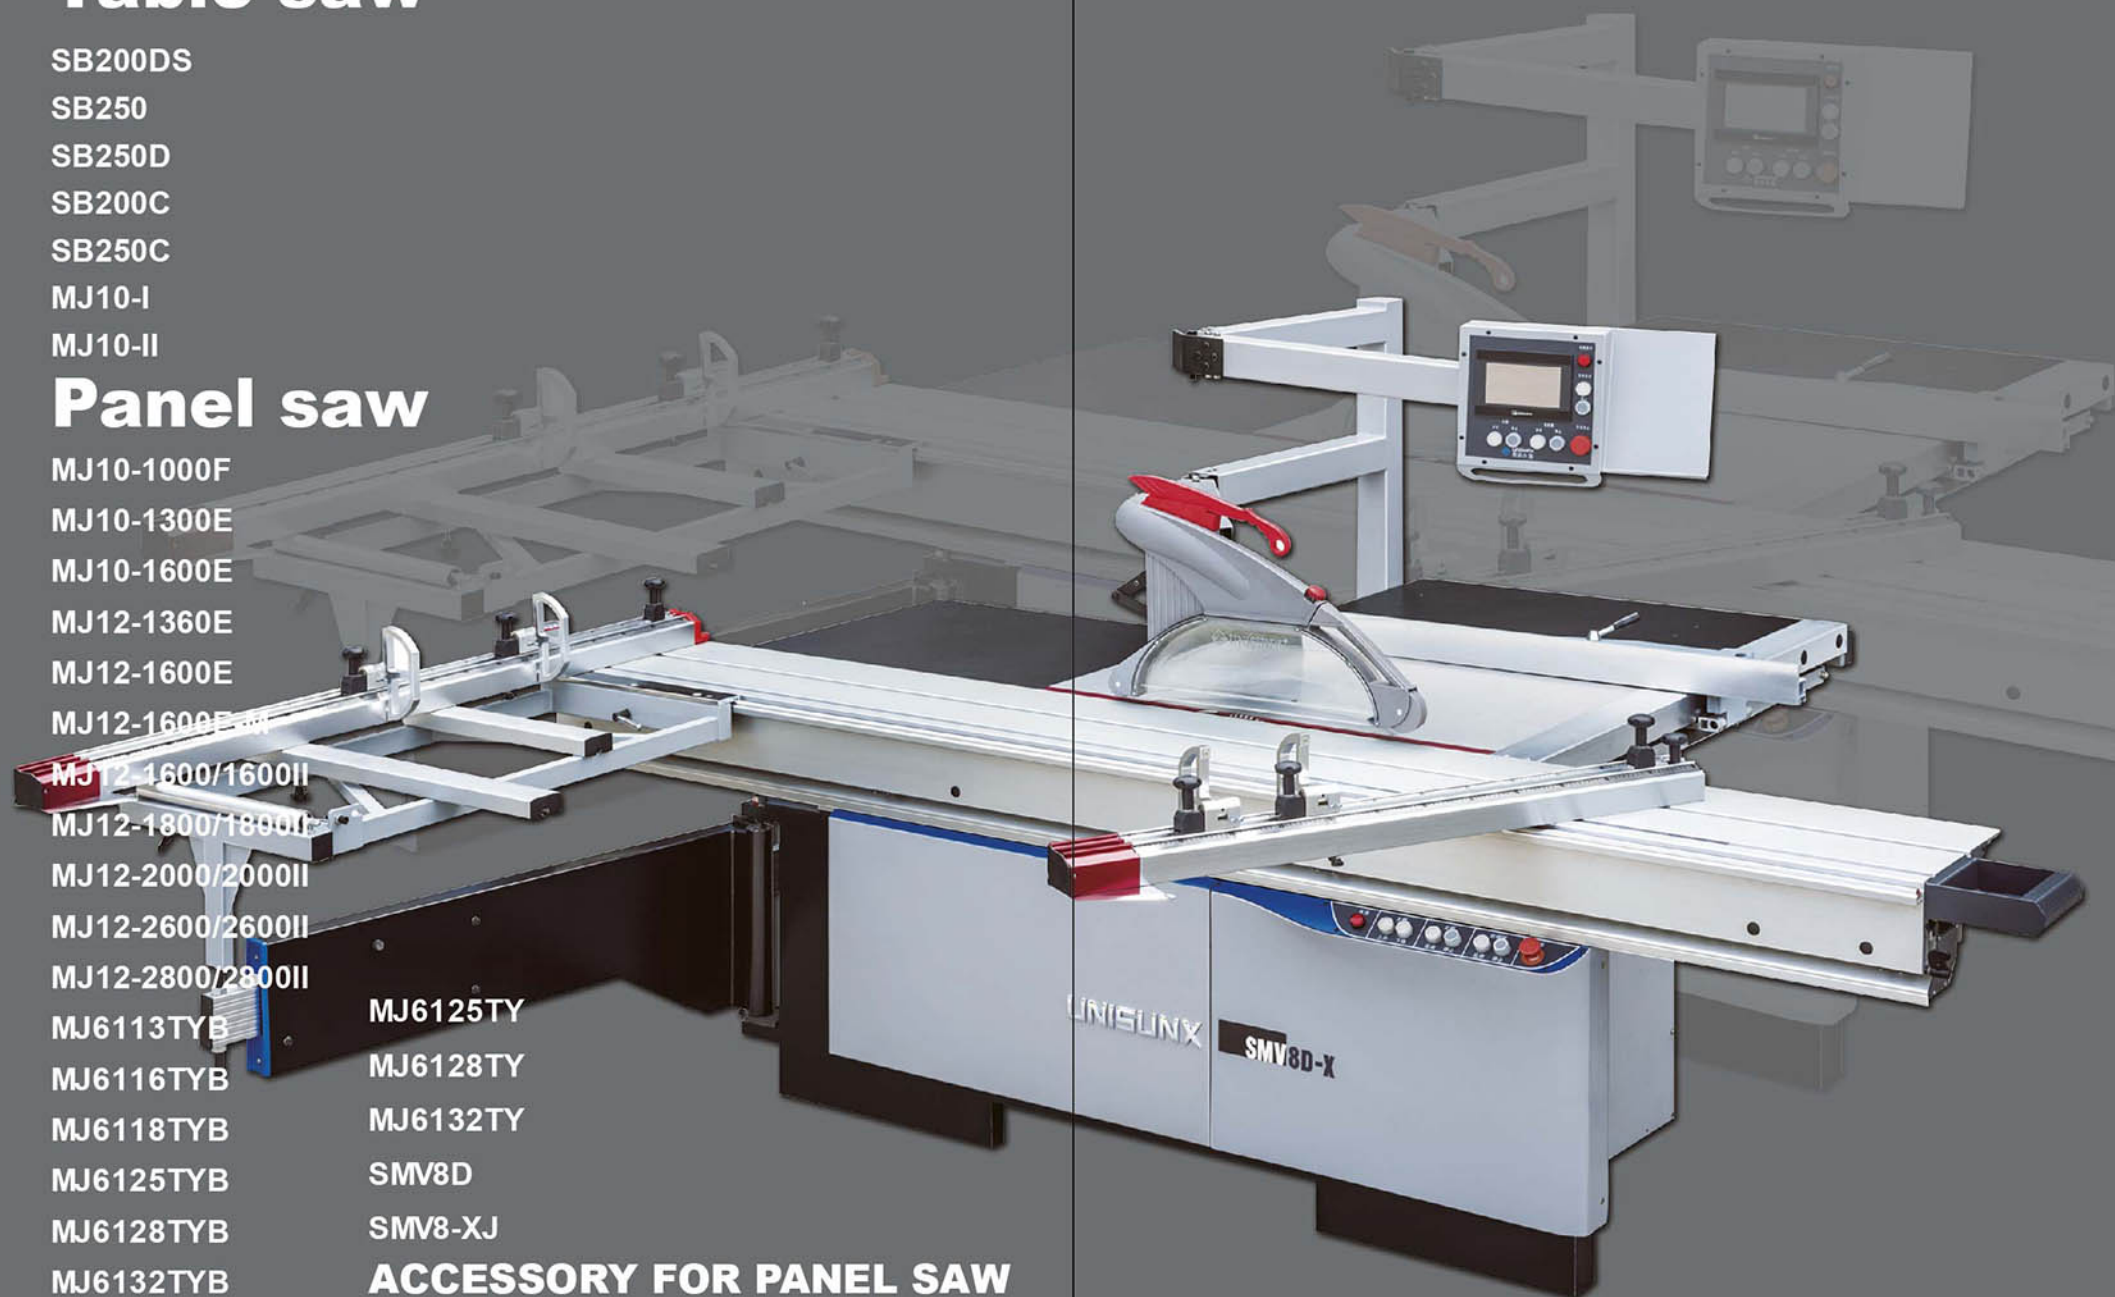

WOODWORKING TABLE SAWS



Model	SB200DS	SB250
Description	8" TABLE SAW	10" TABLE SAW
Table size(mm)	535 x 400	635x430
With table extensions(mm)	535 x 1000	635x1030
Saw blade / bore size	30mm / 200mm	30mm / 254mm
Motor	1100w	1500w
Blade speed(RPM)	4750	4750
Max. depth of cut at 90°	60mm	82mm
Max. depth of cut at 45°	40mm	60mm
Cutting width with table extension	750mm	750mm
Cutting width without table extension	150mm	150mm
Coupling joint for vacuum exhaust	65/25mm	65/25mm
N/G Weight(kgs)	52/58;12/13;5/6	56/58;15/16;10/11;5/5/6
Package size(mm)	590X505X410	710X520X410
	1030X195X120	1240X70X270
	620X580X65	1020X70X680
		580X100X90

Model SB250D

Description	10" table saw
Motor	1500W
Saw blade / bore size(mm)	30mm arbor, 250mm dia.
Blade speed(rpm)	4750 RPM
Table size(mm)	670 x 430
With table extensions(mm)	670 x 1030
Max. depth of cut at 90 degrees	79mm
Max. depth of cut at 45 degrees	60mm
Cutting width with table extension	400mm
	465mm with R/H Table kit
Coupling joint for vacuum exhaust	50/25mm
Overall Size(mm)	1200x960x1090
Package size (2 cartons per pcs)	730x582x390mm, 1052x312x192 mm
Net Weight	56KGS, 31KGS
20' Container load	90PCS



Main Features:

- Cast iron table and sliding table
- 1500W induction motor fitted
- Big deluxe aluminum rip fence for better performance
- Double side extension tables

Model SB200C

Description	8" table saw
Motor	1100W
Saw blade / bore size	30mmx200mm
Blade speed	4700 RPM
Table size	530x400mm
With table extensions	530x1000mm
Max. depth of cut at 90°	60mm
Max. depth of cut at 45°	40mm
Cutting width with table extension	730mm
Cutting width w/o table extension	150mm
Coupling joint	65/25mm
Overall Size	1520x1010x1050
Package size (4 cartons per pcs)	640X590X400; 790x80x1070 1040x70x270; 560x470x180
N.G Weight	52/58KGS,7/9KGS 12/13KGS,18/19KGS
20' Container load	100PCS

Model SB250C

Description	10" table saw
Motor	1500W
Saw blade / bore size	30mmx250mm
Blade speed	4750 RPM
Table size	630x430mm
With table extensions	630x1030mm
Max. depth of cut at 90°	80mm
Max. depth of cut at 45°	60mm
Cutting width with table extension	700mm
Cutting width w/o table extension	150mm
Coupling joint	65/25mm
Overall Size	1500x1200x1100
Package size (4 cartons per pcs)	740x590x400; 790x80x1070 1240x70x270; 560x470x180
N.G Weight	56/58KGS,10/12KGS 15/16KGS,18/19KGS
20' Container load	90PCS

Main Features:

- Cast iron table and sliding table
- 1500W induction motor fitted
- Full close stand SB250-CLEG as standard accessory
- Big deluxe aluminum rip fence for better performance


WOODWORKING TABLE SAWS

Model MJ10-I

Motor power	2200w
Major Cast iron table	670x430mm
Extension steel tables	670x300mm x2
Main blade size	254xΦ30x2.7mm
Max cut depth at 90°	80mm
Max cut depth at 45°	60mm
Max distance-blade to rip fence	450mm(750mm)
Main blade speed	4750 rpm
Overall size	1030x800x870 mm
Suction inlets	50/25mm
Packing size	720x670x560mm ; 1070X660X140mm
N.G. Weight	78/100kgs;27/30kgs
Units/20'GP	72pcs

Main Features:

- Cast iron saw unit supply stronger structural stability
- Large 80mm cutting capacity with quiet and powerful 2.2kW motor
- One cast iron table with two steel tables for large working area
- Smooth tilt and height adjustment

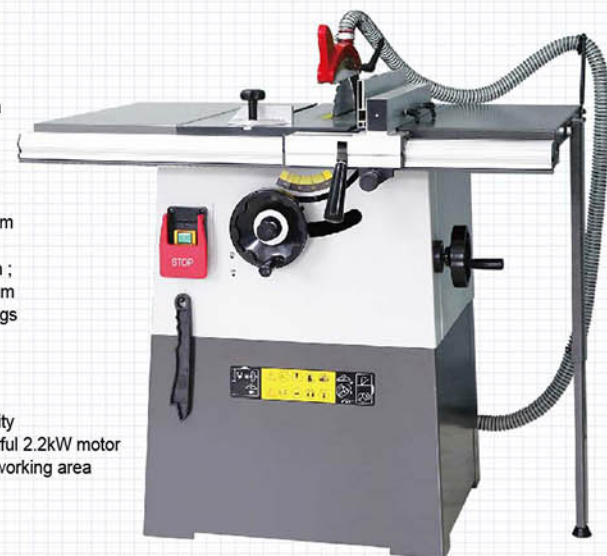

Model MJ10-II

Motor power	2200w
Major Cast iron table	670x430mm
Extension steel tables	670x600mm
Main blade size	254xΦ30x2.7mm
Max cut depth at 90°	80mm
Max cut depth at 45°	60mm
Max distance-blade to rip fence	750mm
Main blade speed	4750 rpm
Overall size	1470x1200x870
Suction inlets	50/25mm
Packing size	720x670x560mm ; 1070X660X140mm 1240x80x260mm
N.G. Weight	78/100;27/30;15/16kgs
Units/20'GP	66pcs

Main Features:

- Cast iron saw unit supply stronger structural stability
- Sliding table for easier operation
- Large 80mm cutting capacity with quiet and powerful 2.2kW motor
- One cast iron table with two steel tables for large working area
- Smooth tilt and height adjustment
- Optional rear aluminum support for steel tables



PANEL SAWS



Model MJ10-1000F

Motor Power(W)	2200W
Major Cast iron Table Size(mm)	310×670
Extension Table(mm)	400×670
Sliding panel Size(mm)	1000 x 247
Blade Size(mm)	254×30×2.7
Blade Speed(RPM)	4750
Max Cut Depth 90°(mm)	80
Max Cut Depth 45°(mm)	65
Cutting width on rip fence(mm)	680
Sliding panel stroke(mm)	640
Packing Size(mm)	770x700x650mm(Main Machine); 1040x600x129mm(Stand)
N/G Weight(kgs)	75/90Kgs;27/28.5Kgs
Units/20'GP	67pcs

* 1.3M length sliding table available with model no **MJ10-1300F** **MJ10-1000FR** with steel round bar rip fence channel with packing size:770x700x700mm(Main Machine);1330x600x135mm(Stand)

PANEL SAWS



Model MJ10-1300E MJ10-1600E

Motor Power	2200W	2200W
Major Cast iron Table Size	310×670mm	310×670mm
Extension Table	400×670mm	400×670mm
Rear Extension Table	310×325mm	310×325mm
Sliding panel Size	1300×238mm	1600×238mm
Extension sliding panel size	600×450mm	600×450mm
Cross Cut Fence	1200mm	1200mm
Main Blade Size	254×30×2.7mm	254×30×2.7mm
Main Blade Speed	4750 rpm	4750 rpm
Max Cut Depth	80mm at 90° 65mm at 45°	80mm at 90° 65mm at 45°
Max Distance-blade to rip fence	680mm	680mm
Sliding Panel Stroke	1300mm	1600mm
Packing Size	820×700×1020mm 1330X250X320mm	820×700×1020mm 1650X210X270mm
N,W/G,W	115/140kgs;25/30kgs	115/140kgs;35/36kgs

PANEL SAWS

Model MJ12-1600E(MJ103H)

Motor Power(W)	2200W
Major Table Size(mm)	350X760
Extension Table(mm)	600X760
Rear Extension Table(mm)	350X500
Sliding panel Size(mm)	1600X238
Cross Cut Table Size(mm)	680X580

Cross Cut Fence(mm)	1200-2200
Blade Size(mm)	315X30X3
Blade Speed(RPM)	4250(50hz) 5130(60hz)

Max Cut Depth 90°(mm)	100
Max Cut Depth 45°(mm)	75
Cutting width on rip fence(mm)	940
Cutting Length(mm)	1220
Packing Size(mm)	1220X1002X1026 1770X450X200

N/G Weight(kgs)	170/235;32/35
Units/20'GP	20pcs

* Sliding table 1360X238mm available with model number **MJ12-1360E**, and packing size:1032x982x1026mm;1470x450x200mm



* Cast Iron Handwheel as optional

Model MJ12-1600E-M(MJ103H-M)

Motor Power(W)	3000W(brake motor)
Major Table Size(mm)	350X795
Extension Table(mm)	600X795
Rear Extension Table(mm)	350X485
Sliding panel Size(mm)	1600X238
Cross Cut Table Size(mm)	420X600
Cross Cut Fence(mm)	1215-2200
Blade Size(mm)	315X30X3
Blade Speed(RPM)	4250(50hz) / 5130(60hz)

Max Cut Depth 90°(mm)	105
Max Cut Depth 45°(mm)	75
Cutting width on rip fence(mm)	940
Cutting Length(mm)	1540
Packing Size(mm)	1210X990X1020 1730X460X210
N/G Weight(kgs)	187.5/226.5;34/37
Units/20'GP	20pcs

PANEL SAWS



Model "II" STYLE

Model MJ12-1600/1600 II MJ12-1800/1800 II MJ12-2000/2000 II

Motor Power	3000W(three Phases) 2200W(single phase)	3000W(three Phases) 2200W(single phase)	3000W(three Phases) 2200W(single phase)
"II" STYLE:	3800W(three Phases) 3000W(single phase)	3800W(three Phases) 3000W(single phase)	3800W(three Phases) 3000W(single phase)
Major Table Size	385X800mm	385X800mm	385X800mm
Extension Table (Cast Iron)	440X800mm	440X800mm	440X800mm
Extension Table (Steel plate)	440X800	440X800	440X800
Rear Extension Table	310X500mm	310X500mm	310X500mm
Sliding panel Size	1600X270mm	1800X270mm	2000X270mm
Cross Cut Table Size	680X580mm	680X580mm	680X580mm
Cross Cut Fence	1200-2200mm	1200-2200mm	1200-2200mm
Main Blade Size	315X30X3mm	315X30X3mm	315X30X3mm
Main Blade Speed	4000rpm	4000rpm	4000rpm
"II" STYLE:	4500rpm	4500rpm	4500rpm
Scoring Blade Size	90X20X3mm	90X20X3mm	90X20X3mm
Scoring Blade Speed	5800rpm	5800rpm	5800rpm
"II" STYLE:	8500rpm	8500rpm	8500rpm
Max Cut Depth	100mm at 90°(315) 80mm at 45°(315)	100mm at 90°(315) 80mm at 45°(315)	100mm at 90°(315) 80mm at 45°(315)
Max Distance-blade to rip fence	1220mm	1220mm	1220mm
Max cross cut Length	1600mm	1800mm	2000mm
Max cross Cut Width	1350mm	1350mm	1350mm
Packing Size	940X765X1010mm 1660X250X320mm	940X765X1010mm 1860X250X320mm	940X765X1010mm 2060X250X320mm
N,W/G,W	210/250kg;40/55kg	210/250kg;45/55kg	210/250kg;50/60kg
"II" STYLE:	225/265kg;40/55kg	225/265kg;45/55kg	225/265kg;50/60kg
Units/20'GP	34pcs	34pcs	33pcs

PANEL SAWS



"II" STYLE


Model	MJ12-2600/2600 II	MJ12-2800/2800 II
Motor Power	3000W(three Phases) 2200W(single phase)	3000W(three Phases) 2200W(single phase)
"II" STYLE:	3800W(three Phases) 3000W(single phase)	3800W(three Phases) 3000W(single phase)
Major Table Size	385X800mm	385X800mm
Extension Table (Cast Iron)	440x800mm	440x800mm
Extension Table (Steel plate)	440x800	440x800
Rear Extension Table	310X500mm	310X500mm
Sliding panel Size	2600X270mm	2800X270mm
Cross Cut Table Size	680x580mm	680x580mm
Cross Cut Fence	1200-2200mm	1200-2200mm
Main Blade Size	315X30X3mm	315X30X3mm
Main Blade Speed	4000rpm	4000rpm
"II" STYLE:	4500rpm	4500rpm
Scoring Blade Size	90X20X3mm	90X20X3mm
Scoring Blade Speed	5800rpm	5800rpm
"II" STYLE:	8500rpm	8500rpm
Max Cut Depth	100mm at 90°(315) 80mm at 45°(315)	100mm at 90°(315) 80mm at 45°(315)
Max Distance-blade to rip fence	1220mm	1220mm
Max cross cut Length	2600mm	2800mm
Max cross Cut Width	1350mm	1350mm
Packing Size	1600x765x1050mm 2660x250x320mm	1600x765x1050mm 2860x250x320mm
N,W/G,W	240/300kg;55/69kg	240/300kg;60/75kg
"II" STYLE:	255/315kg;55/69kg	255/315kg;60/75kg
Units/20'GP	14pcs	14pcs

PANEL SAWS

ACCESSORIES FOR INDUSTRIAL PANEL SAWS




Pneumatic pressure device

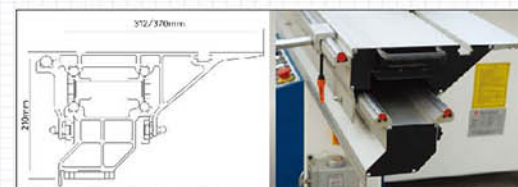

Y style sliding table



Pneumatic pressure device assembled

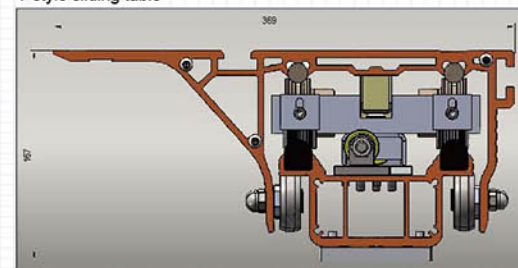

YB style sliding table



50mm diameter rip fence channel



Type-E protection hood



Type-S protection hood



Type-A protection hood



Lubrication pump



Digital viewer



Support feeding frame



Hold down clamp

PANEL SAWS



Model	MJ6113TYB	MJ6116TYB	MJ6118TYB
Dimensions sliding table	1300X370mm	1600X370mm	1800X370mm
Gross cut capacity	1300mm	1600mm	1800mm
Width of cut between blade and rip fence	1250mm	1250mm	1250mm
Saw blade ϕ	300mm(ϕ 250- ϕ 315)	300mm(ϕ 250- ϕ 315)	300mm(ϕ 250- ϕ 315)
Height of cut ϕ 300mm	80mm	80mm	80mm
Height of cut ϕ 300mm at 45°	55mm	55mm	55mm
Speed of main saw blade	4000/6000rpm	4000/6000rpm	4000/6000rpm
Spindle diameter	30mm	30mm	30mm
Tilling saw blade	0-45°	0-45°	0-45°
Main motor	4kw	4kw	4kw
Scoring saw blade	120mm	120mm	120mm
Speed of scoring saw blade	8000r/min	8000r/min	8000r/min
Spindle of scoring saw	20mm	20mm	20mm
Motor	0.75kw	0.75kw	0.75kw
N/G weight	420/490;38/70kgs	420/490;45/80kgs	420/490;50/85kgs
Overall dimensions	1350X2450X900mm	1650X2450X900mm	1850X2450X900mm
Packing size	1390x1150x1150mm	1390x1150x1150mm	1390x1150x1150mm
	1550x440x240mm	1850x440x240mm	2050x440x240mm

• YB style sliding table fitted as standard

PANEL SAWS



Main Features and Standard fitting:

- 1) 40mm diameter rip fence channel
- 2) Type-S protection hood
- 3) Manual saw blade titling 45 degree


Model	MJ6125TYB/TY	MJ6128TYB/TY	MJ6132TYB/TY
Dimensions sliding table	TYB: 2500×360mm TY: 2500×370mm	2800×360mm 2800×370mm	3200×360mm 3200×370mm
Gross cut capacity	2500mm	2800mm	3200mm
Width of cut between saw blade and rip fence	1250mm	1250mm	1250mm
Saw blade ϕ	300mm(ϕ 250- ϕ 315)	300mm(ϕ 250- ϕ 315)	300mm(ϕ 250- ϕ 315)
Height of cut ϕ 300mm	80mm	80mm	80mm
Height of cut with saw blade ϕ 300mm at 45°	50mm	50mm	50mm
Speed of main saw blade	4000/6000rpm	4000/6000rpm	4000/6000rpm
Spindle diameter	30mm	30mm	30mm
Tilling saw blade	0-45°	0-45°	0-45°
Main motor	5.5kw	5.5kw	5.5kw
Scoring saw blade	120mm	120mm	120mm
Speed of scoring saw blade	8000r/min	8000r/min	8000r/min
Spindle of scoring saw	20mm	20mm	20mm
Motor	0.75kw	0.75kw	0.75kw
N/G weight	580/670;70/125kgs	580/670;80/135kgs	580/670;90/150kgs
Overall dimensions	2550X3390X900mm	2850X3390X900mm	3250X3390X900mm
Packing size	2200x1150x1150mm 3050x440x240mm	2200x1150x1150mm 3250x440x240mm	2200x1150x1150mm 3450x440x240mm

• TYB: serial with YB style sliding table as standard

• TY serial with Y style sliding table as standard

PANEL SAWS

PANEL SAWS

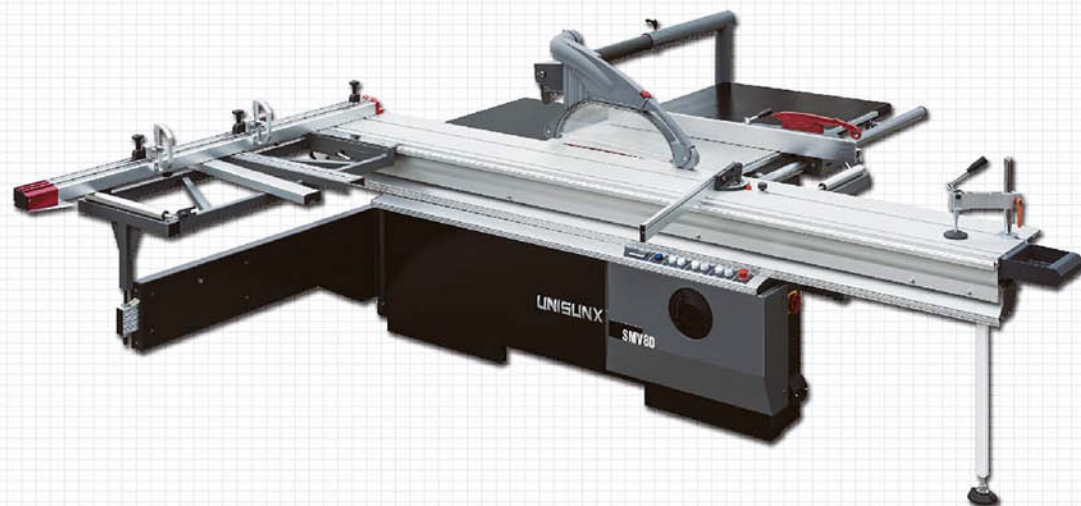

Model SMV8D

Dimensions sliding table	3200×405mm
Gross cut capacity	3200mm
Width of cut between saw blade and rip fence	1250mm
Saw blade ϕ	300mm(ϕ 250- ϕ 350)
Height of cut ϕ 300mm	80mm
Height of cut with saw blade ϕ 300mm at 45°	50mm
Speed of main saw blade	3000/4000/5000rpm
Spindle diameter	30mm
Tilting saw blade	0-45°
Main motor	5.5kw
Scoring saw blade	120mm
Speed of scoring saw blade	8000r/min
Spindle of scoring saw	20mm
Motor	0.75kw
N/G weight	600/690;160/180kgs
Overall dimensions	3250×3500×870mm
Packing size	2260×1200×1150mm 3450×485×340mm



★ Main saw construction

Main Features:

- 1) 50mm diameter Guide shaft spindle
- 2) Full size extension tables in right side and rear side
- 3) Lubrication pump
- 4) Support feeding frame
- 5) Type Round Front control panelhood
- 6) Type-A protection hood
- 7) Electric control saw blade up & down
- 8) Hold down clamp
- 9) Manual tilting 45 degree
- 10) Max saw blade capacity 350mm
- 11) Big aluminum straight fence for 45 degree working



Model SMV8D-XJ

Dimensions sliding table	3200×435mm
Gross cut capacity	3200mm
Width of cut between saw blade and rip fence	1300mm
Saw blade ϕ	300mm(ϕ 250- ϕ 400)
Height of cut ϕ 300mm	80mm
Height of cut with saw blade ϕ 300mm at 45°	55mm
Speed of main saw blade	3000/4000/5000rpm
Spindle diameter	30mm
Tilting saw blade	0-45°
Main motor	5.5kw
Scoring saw blade	120mm
Speed of scoring saw blade	8000r/min
Spindle of scoring saw	20mm
Motor	0.75kw
Net weight	1080 kgs
Overall dimensions	3350×3600×900mm
Packing size	2200×1340×1150mm 3450×530×340mm



★ Round stick rail



★ Inner structure

Main Features:

- ★ Saw blades are electric lifting and manual tilting
- ★ Max main saw blade size 400mm
- ★ Double blades for scoring saw
- ★ **SMV8D-X** Both main saw and scoring saw blades are electric lifting and tilting